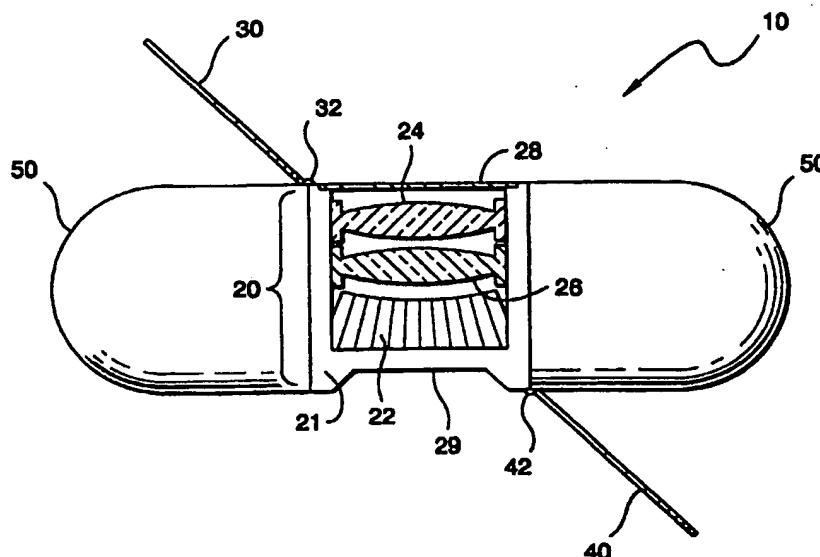


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 21/00, 21/03, 33/48	A1	(11) International Publication Number: WO 99/61891 (43) International Publication Date: 2 December 1999 (02.12.99)
(21) International Application Number: PCT/US99/11693 (22) International Filing Date: 26 May 1999 (26.05.99) (30) Priority Data: 60/086,987 28 May 1998 (28.05.98) US (71) Applicant (for all designated States except US): DUO MANAGEMENT INTERNATIONAL, LLC [US/US]; Suite 312, 11811 W. Washington Place, Los Angeles, CA 90066 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): MOON, Margaret, E. [US/US]; Suite 312, 11811 W. Washington Place, Los Angeles, CA 90066 (US). VAUGHAN, Sheila, C. [US/US]; Suite A1, 4161 Los Feliz Boulevard, Los Angeles, CA 90027 (US). RAFFENSPERGER, M., Susan [US/US]; Apartment B, 215 7th Street, Seal Beach, CA 90740 (US). (74) Agent: FISH, Robert, D.; Crockett & Fish, Suite 706, 1440 N. Harbor Boulevard, Fullerton, CA 92835 (US).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. With amended claims.

(54) Title: OPTICAL METHOD AND APPARATUS FOR DETERMINING FERTILITY STATUS**(57) Abstract**

An optical method of determining a woman's fertility status is provided, wherein an optical system (20) has a sample receiving surface (29) and an eyepiece (28), such that the sample can be viewed in focus through the optical system (20) without altering the distance between the eyepiece (28) and the sample receiving surface (29) using ambient-light illumination. A sample of a bodily fluid from a female is deposited at the sample receiving surface (29) of the optical system (20) and dried. The dried sample is then inspected using the optical system (20) and the appearance of the dried sample is correlated with a reference.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 99/61891

PCT/US99/11693

-1-

OPTICAL METHOD AND APPARATUS FOR DETERMINING FERTILITY STATUS

This application claims the benefit of U.S. provisional application number 60/086,987 incorporated herein by reference in its entirety.

5 Field of The Invention

The field of the invention is biomedical diagnostics.

Background of The Invention

Conception typically occurs during the period of the menstrual cycle called "ovulation" in humans, which is expected to last about six days. Monitoring ovulation is of great significance, because knowing the time of ovulation enables women to manage their reproductive period. When pregnancy is desired, monitoring of ovulation can be used to find the relatively narrow window of fertility within a menstrual cycle. When pregnancy is not desired, monitoring ovulation can be used as an alternative to classical methods of contraception by determining times of sexual abstinence or use of contraceptives.

15 Many ways of monitoring ovulation are known in the art, and may be broadly characterized as falling within one of two categories. The first category of monitoring ovulation comprises clinical diagnostic methods that are typically available only in hospitals or in a physicians office. Clinical diagnostic methods include sonography, and ELISA based methods to quantify various reproductive hormones. Such methods are relatively accurate, however, clinical
20 diagnostic methods typically involve a significant cost and inconvenience to the patient.

The second category of monitoring ovulation comprises "home" diagnostic methods. Home diagnostic methods can typically be performed with a minimal amount of equipment, and generally rely on simple physical or biochemical observations. Physical observations include, for example, the monitoring of the woman's body temperature. Body temperature testing is based
25 upon the fact that a woman's normal body temperature rises slightly during ovulation. However, improper technique of determining the body temperature may lead to significant inaccuracy. Furthermore, minor infections, stress, and dietary influences may cause fluctuations in the body temperature and make this method relatively inaccurate. Biochemical observations include quantitative tests of reproductive hormones in urine. For example, home tests to determine the

WO 99/61891

PCT/US99/11693

-2-

level of luteinizing hormone or progesterone in urine are commercially available over the counter. Home based urine tests are typically easy to perform, and require little time. However, home based urine tests tend to be expensive, especially when repeated over a longer period of time.

5 The time of ovulation can also be determined by observing the appearance of crystallized saliva (i.e. saliva that has been allowed to dry at room temperature). It is known in the art that hormonal changes during a woman's menstrual cycle affect the appearance of crystallized saliva, manifested as formation of characteristic crystals that can be observed using a magnification device (see Figure 1).

10 Determination of ovulation by microscopic observation of crystallized saliva is advantageous because it is inexpensive, relatively accurate and follows a simple protocol that allows even the inexperienced user to obtain reliable test results. Moreover, microscopic observation of crystallized saliva is accurate even when menstrual cycles are erratic, ovulation is irregular, or menstrual disturbances are experienced. Furthermore, microscopic observation of
15 crystallized saliva is a non-invasive and painless method that can be performed discretely and relatively quickly.

Various optical systems are known in the art to help determine ovulation by microscopic observation of crystallized saliva. U.S. Pat. No. 4,737,016 to Russell et al., for example, describes a portable handheld microscope with a single lens. Although the portable handheld
20 microscope can be used to observe a crystallized saliva sample, it is originally designed to view small insects or other small objects, and sample handling is therefore rather cumbersome.

In another example, U.S. Pat. No. 5,062,697 to Mitchell, a handheld microscope is presented wherein a test sample can be compared with a reference sample in a single step. However, manual focussing is required, complicating the use of the device. Furthermore,
25 batteries and an intact light bulb are needed to provide transillumination of the sample.

In a further example, U.S. Pat. No. 5,639,424 to Rausnitz, up to 30 samples can be viewed on a sample disc in a portable fertility tester. The sample disc, however, introduces an additional part that is essential to the function of the tester. If the disc is broken or lost, no more

WO 99/61891

PCT/US99/11693

-3-

tests can be performed. Moreover, the advantage of accommodating up to 30 samples disadvantageously leads to a larger test device.

In still further examples, U.S. Pat. No. 5,572,370 to Cho, and U.S. Pat. No. 4,815,835 to Ortueta Corona, fertility testers are described, in which the optical device has to be disassembled
5 in order to apply a sample of saliva. Disassembling, applying the sample, reassembling and adjusting the focus of the fertility tester, and holding down the light switch, however, requires at least some degree of dexterity, which might be problematic for some users.

Viewing a magnified crystallized saliva sample using lenses typically requires a relatively strong light source. Most known fertility testers use batteries and a light bulb or an LED as a
10 light source, which tends to be problematic in some countries, especially in third world countries. Moreover, the use of batteries demands appropriate battery recycling when a negative impact to the environment is to be avoided.

The fertility tester "PFT 1-2-3" avoids problems with built-in backlighting devices by using ambient light. In the "PFT 1-2-3", various color filters are mounted on one disc and a
15 miniature lens is mounted on a second disc. Both discs are rotatably connected at their center, and lens and color filter have to be aligned by turning the miniature lens-containing disc relative to the filter-containing disc to examine a crystallized saliva sample. Although the two discs are spaced in such a way that the crystallized saliva sample is in focus, the miniature lens does not allow substantial tolerance in the distance between the two discs. Therefore, manual pressure has
20 often to be applied to both discs in order to refocus. Moreover, due to the small size of the magnifying lens, the observation area is relatively small.

In most or all devices known in the art to visually inspect a crystallized saliva sample, an optical system must be focused. To obtain a sharp image of the crystallized saliva, the distance
between the crystallized saliva and an eyepiece is usually altered. However, focussing an optical
25 system usually requires some practice and may be cumbersome, especially for the inexperienced user. Moreover, focusing optical systems typically requires moving parts that may be subject to malfunction, possibly leading to false-positive or false-negative test results.

WO 99/61891

PCT/US99/11693

-4-

In general, many devices to determine ovulation by observing crystallized saliva are known. However, such devices typically suffer from one or more difficulties including problematic sample application, need of an internal light source, or problematic focussing of the eyepiece on the sample. Therefore, there is a need to provide apparatus and methods to solve these problems.

Summary of the Invention

Methods and apparatus for determining a woman's fertility status are provided in which a sample is consistently viewed in focus through an optical system, without altering the distance between the eyepiece and the sample receiving surface.

10 In preferred embodiments the optical system includes at least two lenses, and optionally includes a filter. It is also preferred that the bodily fluid is saliva or vaginal fluid.

Various objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of preferred embodiments of the invention, along with the accompanying drawings in which like numerals represent like components.

Brief Description of The Drawings

Figure 1 is a collection of prior art photomicrographs of samples of crystallized saliva.

Figure 2 shows a schematic of a fertility tester embodying the inventive subject matter.

20 Figure 3 shows a top view of the fertility tester of Figure 2.

Figure 4 shows general outlines of alternative shapes of the fertility tester of Figure 2.

Detailed Description

In Figure 2, a fertility tester 10 has generally an optical system 20, a top cover 30, a bottom cover 40, and a case 50. The optical system 20 has an optical chamber 21, a condenser 22, a first lens 24, a second lens 26, a protective window 28, and a sample receiving surface 29.

WO 99/61891

PCT/US99/11693

-5-

With respect to the material of preferred fertility tester 10, all parts can be fabricated from injection-molded acrylic. However, many other materials may also be used, including natural and synthetic polymers, metals and glass and any reasonable combination thereof. For example, appropriate alternative materials are polycarbonate, polyethylene, wood, aluminum, and optical glass.

Fertility tester 10 is shown in Figures 2 and 3 as a round disk. Various other shapes, however, are also contemplated, including rectangular and polygonal shapes. Some examples of alternative shapes are shown in Figure 4 and many more alternative shapes can be made without departing from the inventive concepts presented herein.

Fertility tester is preferably approximately 5" in diameter and about 1.5" thick. However, many other dimensions are also contemplated as long as they accommodate optical system 20.

Cover 30 and cover 40 are preferably coupled to case 50 using acrylic hinges 32 and 42. However, many other covers and methods of affixing covers to case 50 are contemplated, that cover the protective window and the sample receiving surface. For example, alternative covers could be pivotably, slidably or rotatably coupled to case 50, and may or may not be permanently attached to case 50.

It is contemplated that case 50 may comprise additional elements, including a pocket, a mirror, a chart to enter fertility status, reference pictures of crystallized saliva, instructions for use, etc. It is further contemplated that case 50 need not necessarily have a top cover or a bottom cover. Alternative fertility testers may therefore have only optical system 20, case 50 and bottom cover 40.

Optical system 20 further comprises optical chamber 21, protective window 28, first lens 24, second lens 26, condenser 22, and sample receiving surface 29.

Optical chamber 21 is preferably statically mounted in case 50. In alternative embodiments, however, many other ways of mounting the optical chamber to a case are contemplated, including mountings wherein the optical chamber is slideably, pivotably or rotatably coupled to a casing.

WO 99/61891

PCT/US99/11693

-6-

Optical chamber 21 is preferably made from non-transparent, tinted, injection-molded acrylic. Optical chamber 21 contains a multi-lens system of two bi-convex acrylic lenses 24, 26, each of which are molded to two annular acrylic spacer elements. Optical chamber 21 further comprises an acrylic protective window 28 opposite to the sample receiving surface 29. In
5 alternative embodiments, various other materials may be used for optical chamber, lenses, annular spacers, and protective window, including transparent synthetic polymers, glass, and metals. For example, alternative lenses may be made from optical glass or polystyrene, annular spacers may be made from polypropylene, optical chambers may be made from steel or brass, and an alternative protective window may be made from transparent polyvinyl chloride.

10 In Figure 2, the bi-convex lenses 24, 26 are prefocused to the sample receiving surface 29, and have a combined magnification of preferably 40x-100x, and more preferably 50x-60x. However, many other arrangements of optical elements are also contemplated, including single lenses, multiple lenses of various characters (e.g. bi-convex, bi-concave, convex-concave, etc.), condenser elements, and filters. For example, contemplated lens systems include systems having
15 two bi-convex and one plano-concave lens. A single lens with an 85x magnification is also contemplated. Contemplated condenser elements may be reflective, refractive, or diffractive. The condenser element may be used to enhance illumination of the sample, for example, using dark-field illumination to increase the contrast of the sample. Appropriate filters include polarizing filters, spectral cut-off filters, or filter groups.

20 In a preferred embodiment, sample receiving surface 29 is a transparent, approximately 1mm thin, rounded off square surface, which is an integral part of optical chamber 21. In alternative embodiments, sample receiving surface 29 may be separable from optical chamber 21. For example, an alternative sample receiving surface includes a glass or transparent polymer surface that may or may not be tinted.

25 Regardless of the arrangement and number of optical elements in optical system 20, the optical elements are situated such that the optical system is prefocused with regard to sample receiving surface 29.

The term "depositing the sample" as used herein means that the sample is transferred directly or indirectly from the source to the sample receiving surface. A direct transfer, for

WO 99/61891

PCT/US99/11693

-7-

example, is licking the surface of the sample receiving surface. An indirect transfer, for example, is applying vaginal fluid from a vaginal swab to the sample receiving surface.

As used herein, the term "bodily fluid" refers to saliva and vaginal fluid and the bodily fluid may be manually collected or with the help of a sampler. Typically, a few microliters of
5 bodily fluid are sufficient for determining the fertility status.

As used herein, the term "ovulation" and "fertile period" are used interchangeably, and both reflect the time during a menstrual cycle during which conception is possible.

As used herein, the term "eyepiece" refers to the lens closest to the eye.

In a preferred method of determining a woman's fertility status, a woman transfers a drop
10 of saliva from her mouth onto a fingertip. The saliva on the fingertip is then wiped over the sample receiving surface. In alternative embodiments, the bodily fluid need not be saliva, but may be various other bodily fluids, including vaginal fluid. Moreover, the bodily fluid need not be transferred onto a fingertip, but may also be transferred in other ways, including direct and indirect application. For example, direct application includes dripping of saliva from the mouth
15 onto the sample receiving surface. An example of indirect application is swabbing the surface of a woman's inner cheek with an applicator, and then wiping the applicator over the sample receiving surface.

The saliva on the sample receiving surface is then dried, preferably at room temperature for about 10min. However, many other ways of drying are also contemplated, including drying at
20 temperatures above or below room temperature. For example, drying may be performed at temperatures of about 30°C to 60°C, or even higher. In another example, drying may be done at temperatures between about 4°C-20°C. Furthermore, the time of drying need not be restricted to 10min, but may vary considerably between a few seconds and several hours, depending on the temperature and amount of bodily fluid. Appropriate drying times are, for example, 10 to 30
25 seconds, but also 30 minutes, and longer.

After drying the bodily fluid on the sample receiving surface, the bodily fluid is inspected using the optical system, and the appearance of the bodily fluid is correlated with a reference. During inspection, the fertility tester is preferably held such that ambient light passes through the

WO 99/61891

PCT/US99/11693

-8-

bodily fluid and eyepiece into the eye of the observer. The protective window is preferably at a distance of about $\frac{1}{2}$ " to 1" from the eye of the observer, and the sample receiving surface points toward an ambient light source.

5 In a preferred embodiment, the ambient light source is preferably an incandescent light bulb. However, in alternative embodiments the ambient light source may be various other light sources including sunlight, fluorescent light bulbs, etc. Furthermore, it is not essential that the protective window is at a distance of $\frac{1}{2}$ " to 1" from the eye of the observer, but many other distances are also contemplated.

10 The reference is preferably a reference chart as depicted in Figure 1 that shows three magnified images of dried saliva, corresponding to a period that is regarded as fertile, possibly fertile, and infertile. In alternative embodiments, however, many other references may be used, including memorized images of dried bodily fluids, and sample images that can be viewed together with dried bodily fluid. In further alternative embodiments, the number of reference images need not be limited to three, but may vary between one and 28, or even more. In still
15 further alternative embodiments, the reference may include additional elements, including a report chart in which test results can be noted.

Thus, specific embodiments and applications of determining a woman's fertility status have been disclosed. It should be apparent, however, to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive
20 concepts herein. The inventive subject matter, therefore, is not to be restricted except in the spirit of the appended claims.

WO 99/61891

PCT/US99/11693

-9-

CLAIMS

What is claimed is:

1. A method of determining a woman's fertility status comprising:
 - 5 providing an optical system having a sample receiving surface and an eyepiece, such that a sample is consistently viewed in focus through the optical system without altering a distance measured between the eyepiece and the sample receiving surface;
 - providing a sample of a bodily fluid from a female;
 - depositing the sample at the sample receiving portion;
 - 10 drying the deposited sample and inspecting the dried sample using the optical system;
 - and
 - correlating the appearance of the dried sample with a reference.
2. The method of claim 1, wherein the optical system comprises a multi-lens system.
3. The method of claim 2, wherein the geometry of at least one lens is a mirror image of
15 another lens.
4. The method of claim 1, wherein the optical system further comprises a condenser.
5. The method of claim 4, wherein the condenser reflects light through the dried sample.
6. The method of claim 4, wherein the condenser is a refractive condenser.
7. The method of claim 1, wherein the optical system further comprises a filter.
- 20 8. The method of claim 1, further comprising providing a protective cover over the optical system.
9. The method of claim 8, wherein the protective cover comprises at least one of a top cover and a bottom cover.

WO 99/61891

PCT/US99/11693

-10-

10. The method of claim 9, wherein the at least one of a top cover and a bottom cover is slideably coupled to the optical system.
11. The method of claim 9, wherein the at least one of a top cover and a bottom cover are pivotably coupled to the optical system.
- 5 12. The method of claim 1, wherein the bodily fluid of a female is selected from the group consisting of saliva and vaginal fluid.
13. The method of claim 1, wherein the step of drying the sample comprises air drying at room temperature for 10min.
- 10 14. The method of claim 1, wherein the reference is a reference chart comprising at least one reference image from a fertile period, one reference image from a transition period, and one reference image from a infertile period.

WO 99/61891

- 11 -

PCT/US99/11693

AMENDED CLAIMS

[received by the International Bureau on 2 November 1999 (02.11.99);
original claim 1 amended; remaining claims unchanged (1 page)]

1. A method of determining a woman's fertility status comprising:

providing an optical system having a non-removable sample receiving surface and an eyepiece, such that a sample is applied to the sample receiving surface and consistently viewed in focus through the optical system without altering a distance measured between the eyepiece and the sample receiving surface;

providing a sample of a bodily fluid from a female;

depositing the sample at the sample receiving portion;


drying the deposited sample and inspecting the dried sample using the optical system; and

correlating the appearance of the dried sample with a reference.
2. The method of claim 1, wherein the optical system comprises a multi-lens system.
3. The method of claim 2, wherein the geometry of at least one lens is a mirror image of another lens.
4. The method of claim 1, wherein the optical system further comprises a condenser.
5. The method of claim 4, wherein the condenser reflects light through the dried sample.
6. The method of claim 4, wherein the condenser is a refractive condenser.
7. The method of claim 1, wherein the optical system further comprises a filter.
8. The method of claim 1, further comprising providing a protective cover over the optical system.
9. The method of claim 8, wherein the protective cover comprises at least one of a top cover and a bottom cover.

WO 99/61891

1/3

PCT/US99/11693

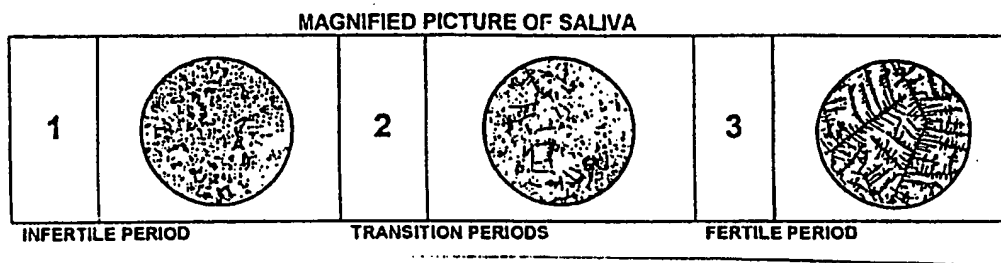*Figure 1*

WO 99/61891

2/3

PCT/US99/11693

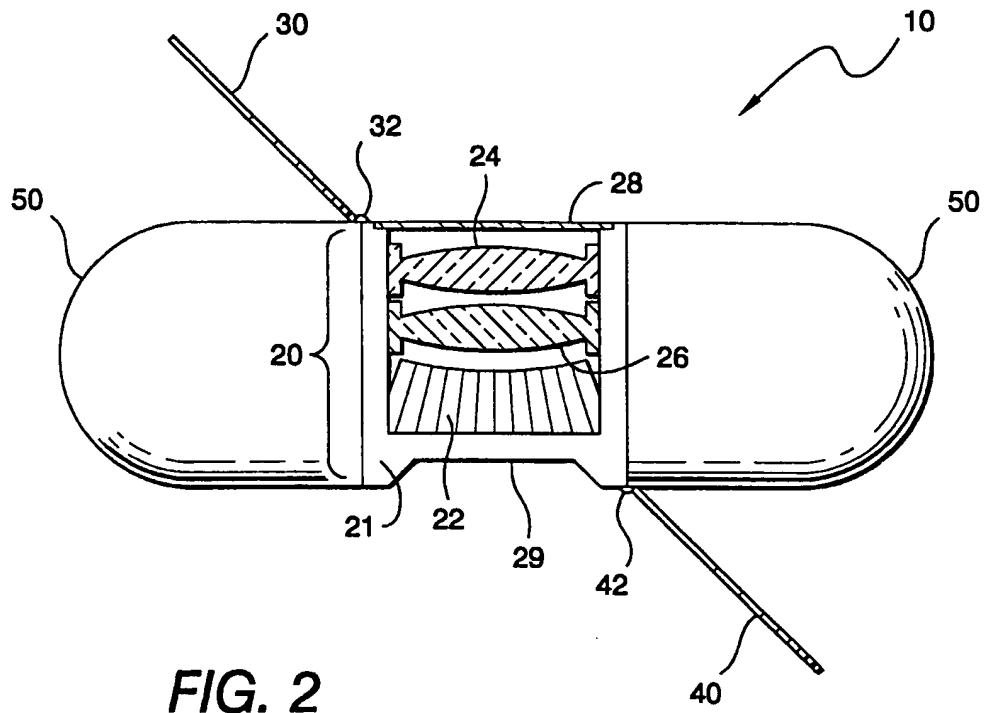


FIG. 2

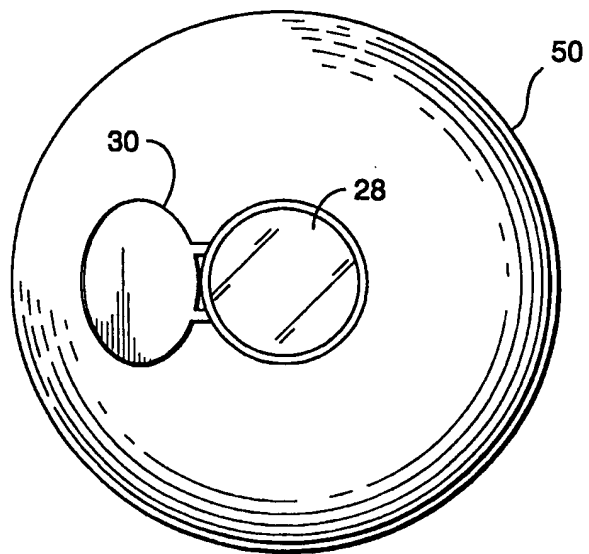


FIG. 3

WO 99/61891

3/3

PCT/US99/11693

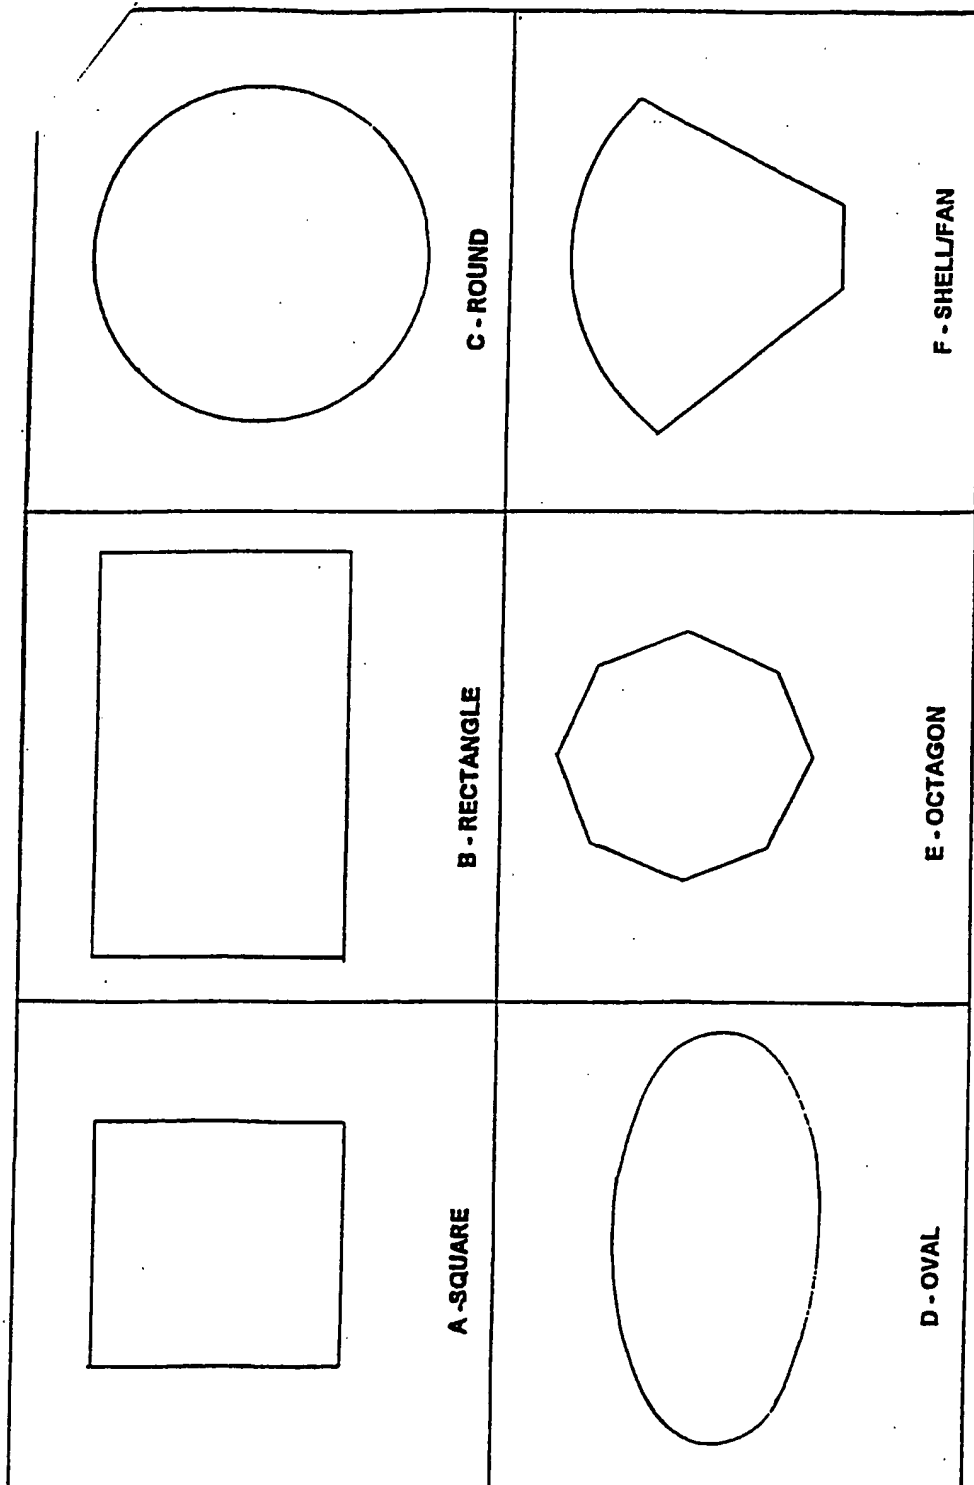




Figure 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/11693

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : G01N 21/00, 21/03; 33/48 US CL : 436/65, 164, 165, 906; 422/55, 58, 82.05; 600/551 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 436/63, 65, 164, 165, 174, 814, 906; 422/55, 58, 82.05; 600/310, 551; 359/396, 398, 801, 803, 804 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS, STN/CA, BIOSIS, MEDLINE, DERWENT search terms: fertility, saliva, optical, prefocused, fixed distance		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	WO 97/23798 A1 (ORELL-PORRAZZO et al.) 03 July 1997, pages 24, 36-38 and 48.	1-2, 12, 14 ----- 3-7, 8-11, 13
Y	US 5,572,370 A (CHO) 05 November 1996, column 3, lines 1-26, column 4, lines 48-68 and column 5, lines 1-28.	3-7, 8-11, 13
A	US 4,815,835 A (ORTUETA-CORONA) 28 March 1989, column 3, lines 51-68 and column 4, lines 1-61.	1-14
A	US 5,267,087 A (WEIDEMANN) 30 November 1993, column 4, lines 14-68 and column 5, lines 1-9.	1-14
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 05 AUGUST 1999		Date of mailing of the international search report 02 SEP 1999
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer  MAUREEN WALLENHORST Telephone No. (703) 308-0661

INTERNATIONAL SEARCH REPORT



International application No.
PCT/US99/11693

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,639,424 A (RAUSNITZ) 17 June 1997, column 3, lines 9-68 and column 4, lines 1-14.	1-14